


CORDLESS



SMARTRISE™
CORDLESS

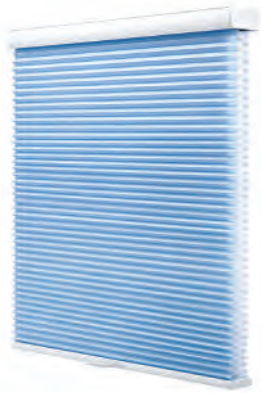

CORDLESS TOP DOWN/
BOTTOM UP



CORDLESS DAY & NIGHT



SMARTFIT™



DECOFLEX™



SMARTFIT™ DUAL SHADE



SMARTFIT™ FOR
SLOPED WINDOWS



DECOFLEX™ FOR
SKYLIGHTS

CORD LOOP



CORD LOOP & SMARTRELEASE™



CORD LOOP TOP DOWN



CORD LOOP DAY & NIGHT

CORDED



CORDED




CORDED TOP DOWN/ BOTTOM UP



CORDED DAY & NIGHT

MOTORISATION

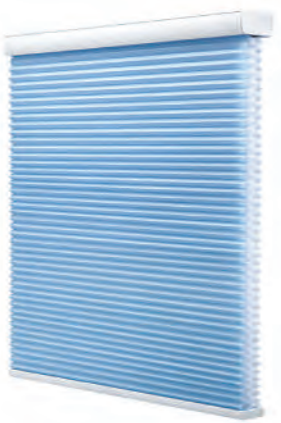

MOTORISED BOTTOM UP




MOTORISED TOP DOWN/ BOTTOM UP



MOTORISED DAY & NIGHT

VERTICAL APPLICATION

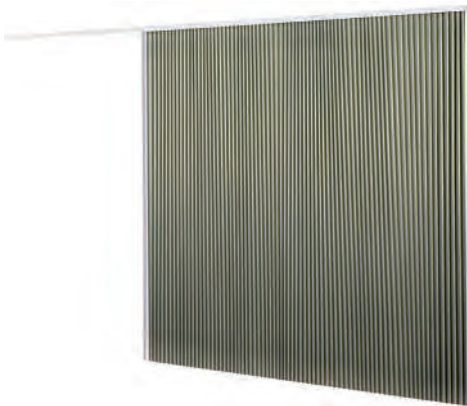

SLIDING VERTICAL



SLIDING VERTICAL DAY & NIGHT

Thermacell Blind Specifications

Easy Reference Size Guide

Note: Minimum/maximum widths shown are the actual finished blind size, after any applicable deductions have been made. Please pay attention to variations highlighted.

Operation Type	Minimum Size			Height	Maximum Size			2 on 1	Inside Width Deduction	Cell Sizes
	Width				Width	Height	M2			
	Standard	Solus	RD Flame Resistant							
Corded	220mm	220mm	Not available	250mm	2500mm	3600mm	5.5m ²	Yes	6mm ^{*3}	All Cell Sizes
SmartRise™ Cordless	280mm	394mm	635mm	250mm	2500mm	2200mm	5.5m ²	Yes	6mm ^{*3}	45mm 62mm
Cord Loop	380mm	380mm	380mm	250mm	3000mm	3600mm	7.5m ²	Yes	6mm ^{*3}	45mm 62mm
SmartFit™	220mm*	220mm*	220mm*	150mm	1270mm 1800mm*	2200mm	2.6m ² 4m ^{2*}	No	6mm	All Cell Sizes
SmartFit Dual	220mm	220mm	220mm	305mm	1270mm 1800mm*	2200mm	2.6m ² 4m ^{2*}	No	4mm	All Cell Sizes
SmartFit™ with Frame	267mm	267mm	267mm	203mm	1318mm 1877mm*	2235mm	2.75m ² 4.2m ^{2*}	No	3.2mm	25mm Only
SmartFit Dual with Frame	267mm	267mm	267mm	356mm	1318mm	2235mm	2.75m ²	No	3.2mm	25mm Only
SmartFit™ Sloped	220mm	Not available	220mm	150mm	1500mm	3000mm	4.5m ²	No	3.2mm	25mm Only
SmartFit™ Sloped with Frame	267mm	Not available	267mm	197mm	1546mm	3092mm	4.67m ²	No	3.2mm	25mm Only
TDBU Corded	220mm	220mm	220mm	250mm	2500mm	3600mm	5.5m ²	No	6mm ^{*3}	All Cell Sizes
TDBU Cordless	380mm	394mm	635mm	250mm	2500mm	2200mm	5.5m ²	No	6mm ^{*3}	45mm 62mm
TD Cord Loop	610mm 762mm ^{*2}	610mm 762mm ^{*2}	610mm 762mm ^{*2}	250mm 1829mm ^{*2}	3000mm	1828mm 3600mm ^{*2}	5.5m ² 7.5m ²	No	6mm ^{*3}	45mm 62mm
Day&Night Corded	220mm	220mm	Not available	250mm	2500mm	3600mm	5.5m ²	No	6mm ^{*3}	All Cell Sizes
Day&Night Cordless	380mm	394mm	Not available	250mm	2500mm	2200mm	5.5m ²	No	6mm ^{*3}	45mm 62mm
Day&Night Cord Loop	610mm 762mm ^{*2}	610mm 762mm ^{*2}	Not available	250mm 1829mm ^{*2}	3000mm	1828mm 3600mm ^{*2}	5.5m ² 7.5m ²	No	6mm ^{*3}	45mm 62mm
Sliding & Sliding D&N	750mm	750mm	Not available	600mm	3700mm ^{*6}	3000mm 2438mm ^{*4}	11.1m ² 9m ² ^{*4}	No	4.8mm ^{*5}	45mm 62mm single
Motorised Cordless	610mm	610mm	610mm	250mm	3000mm	3600mm	11.1m ²	No	6mm ^{*3}	45mm 62mm
Motorised TDBU/D&N	610mm ^{*7}	610mm	610mm (D&N not available)	250mm	3000mm	3600mm	5.57m ²	No	6mm ^{*3}	45mm 62mm

* SmartFit 25mm cell blind over 1271mm wide will be supplied with centre cords. SmartFit Dual 25mm cell maximum width 1270mm.

* SmartFit in frame blind over 1318mm wide will be supplied with centre cords.

* SmartFit 62mm single & double cell are not available as outside mount.

*² Minimum width when opening height is greater than 1828mm.

*³ Deduction is -9.5mm when ordered with hold down bracket.

*⁴ Maximum height and sqm when **FLAME RESISTANT** fabric is ordered.

*⁵ For Sliding and Sliding Day&Night, there will be a height deduction of 15.9mm for inside mount, and 12.7mm for outside mount.

For the maximum and minimum sizes for 2on1 shades, please refer to the relevant operation type sections.

*⁶ When the shade width is greater than 2480mm, or the shade width is greater than the order height -54.9mm for outside mount/-58.1mm for inside mount, the headrail will be split equally. A keystone will be provided to cover the split.

*⁷ For 240V/65W motorised TDBU and D&N, the minimum width is 674mm, the maximum SQM is 7.43m².

All measurements listed above are final blind size measurements.

Thermacell Blind Specifications

CORD TYPES AND CELL SIZES			
Each different type of cord operation is only available in some cell sizes. This chart shows which cord type can be used for each cell size			
	25mm	45mm	62mm
	Single Cell	Single or Double Cell	Single or Double Cell
CORDED	√	√	√
CORDLOOP	N/A	√	√
DAY & NIGHT – CORDED	√	Sheer is 45mm Single	Sheer is 62mm Single
DAY & NIGHT - CORDLESS	N/A	Sheer is 45mm Single	Sheer is 62mm Single
DAY & NIGHT - CORDLOOP	N/A	Sheer is 45mm Single	Sheer is 62mm Single
DAY & NIGHT – MOTORISED	N/A	Sheer is 45mm Single	Sheer is 62mm Single
DAY & NIGHT – SLIDING	N/A	Single Cell Only	Single Cell Only
MOTORISED	N/A	√	√
SKYLIGHT – SmartFit Sloped with NO Frame	√	N/A	N/A
SLIDING	N/A	Single Cell Only	Single Cell Only
SMARTFIT STANDARD	√	√	√
SMARTFIT DUAL	√	√	√
SMARTFIT (All types) with Frame (Decoflex)	√	N/A	N/A
SMARTRISE - CORDLESS	N/A	√	√
TDBU – CORDED	√	√	√
TDBU – CORDLESS	N/A	√	√
TD - CORDLOOP	N/A	√	√
TDBU - MOTORISED	N/A	√	√

Jamb Depths

Listed below are the jamb depths required to fit installation brackets fully within the jamb.

Shade Type	Cell Sizes				
	25mm	45mm D	45mm S	62mm D	62mm S
Cordless (all designs)	34mm	52mm	52mm	68mm	68mm
Smartrise (Cordless)	N/A	50mm	50mm	69mm	69mm
Cordless DayNight & TDBU	N/A	49mm	49mm	69mm	69mm
Cordloop (all designs)	N/A	58mm	58mm	68mm	68mm
Motorised	N/A	58mm	58mm	71mm	71mm
Skylight - SmartFit Sloped	35mm	N/A	N/A	N/A	N/A
Sliding	N/A	N/A	77mm	N/A	77mm
SmartFit (Incl Dual Shade)	32mm	47mm	47mm	66mm	66mm